


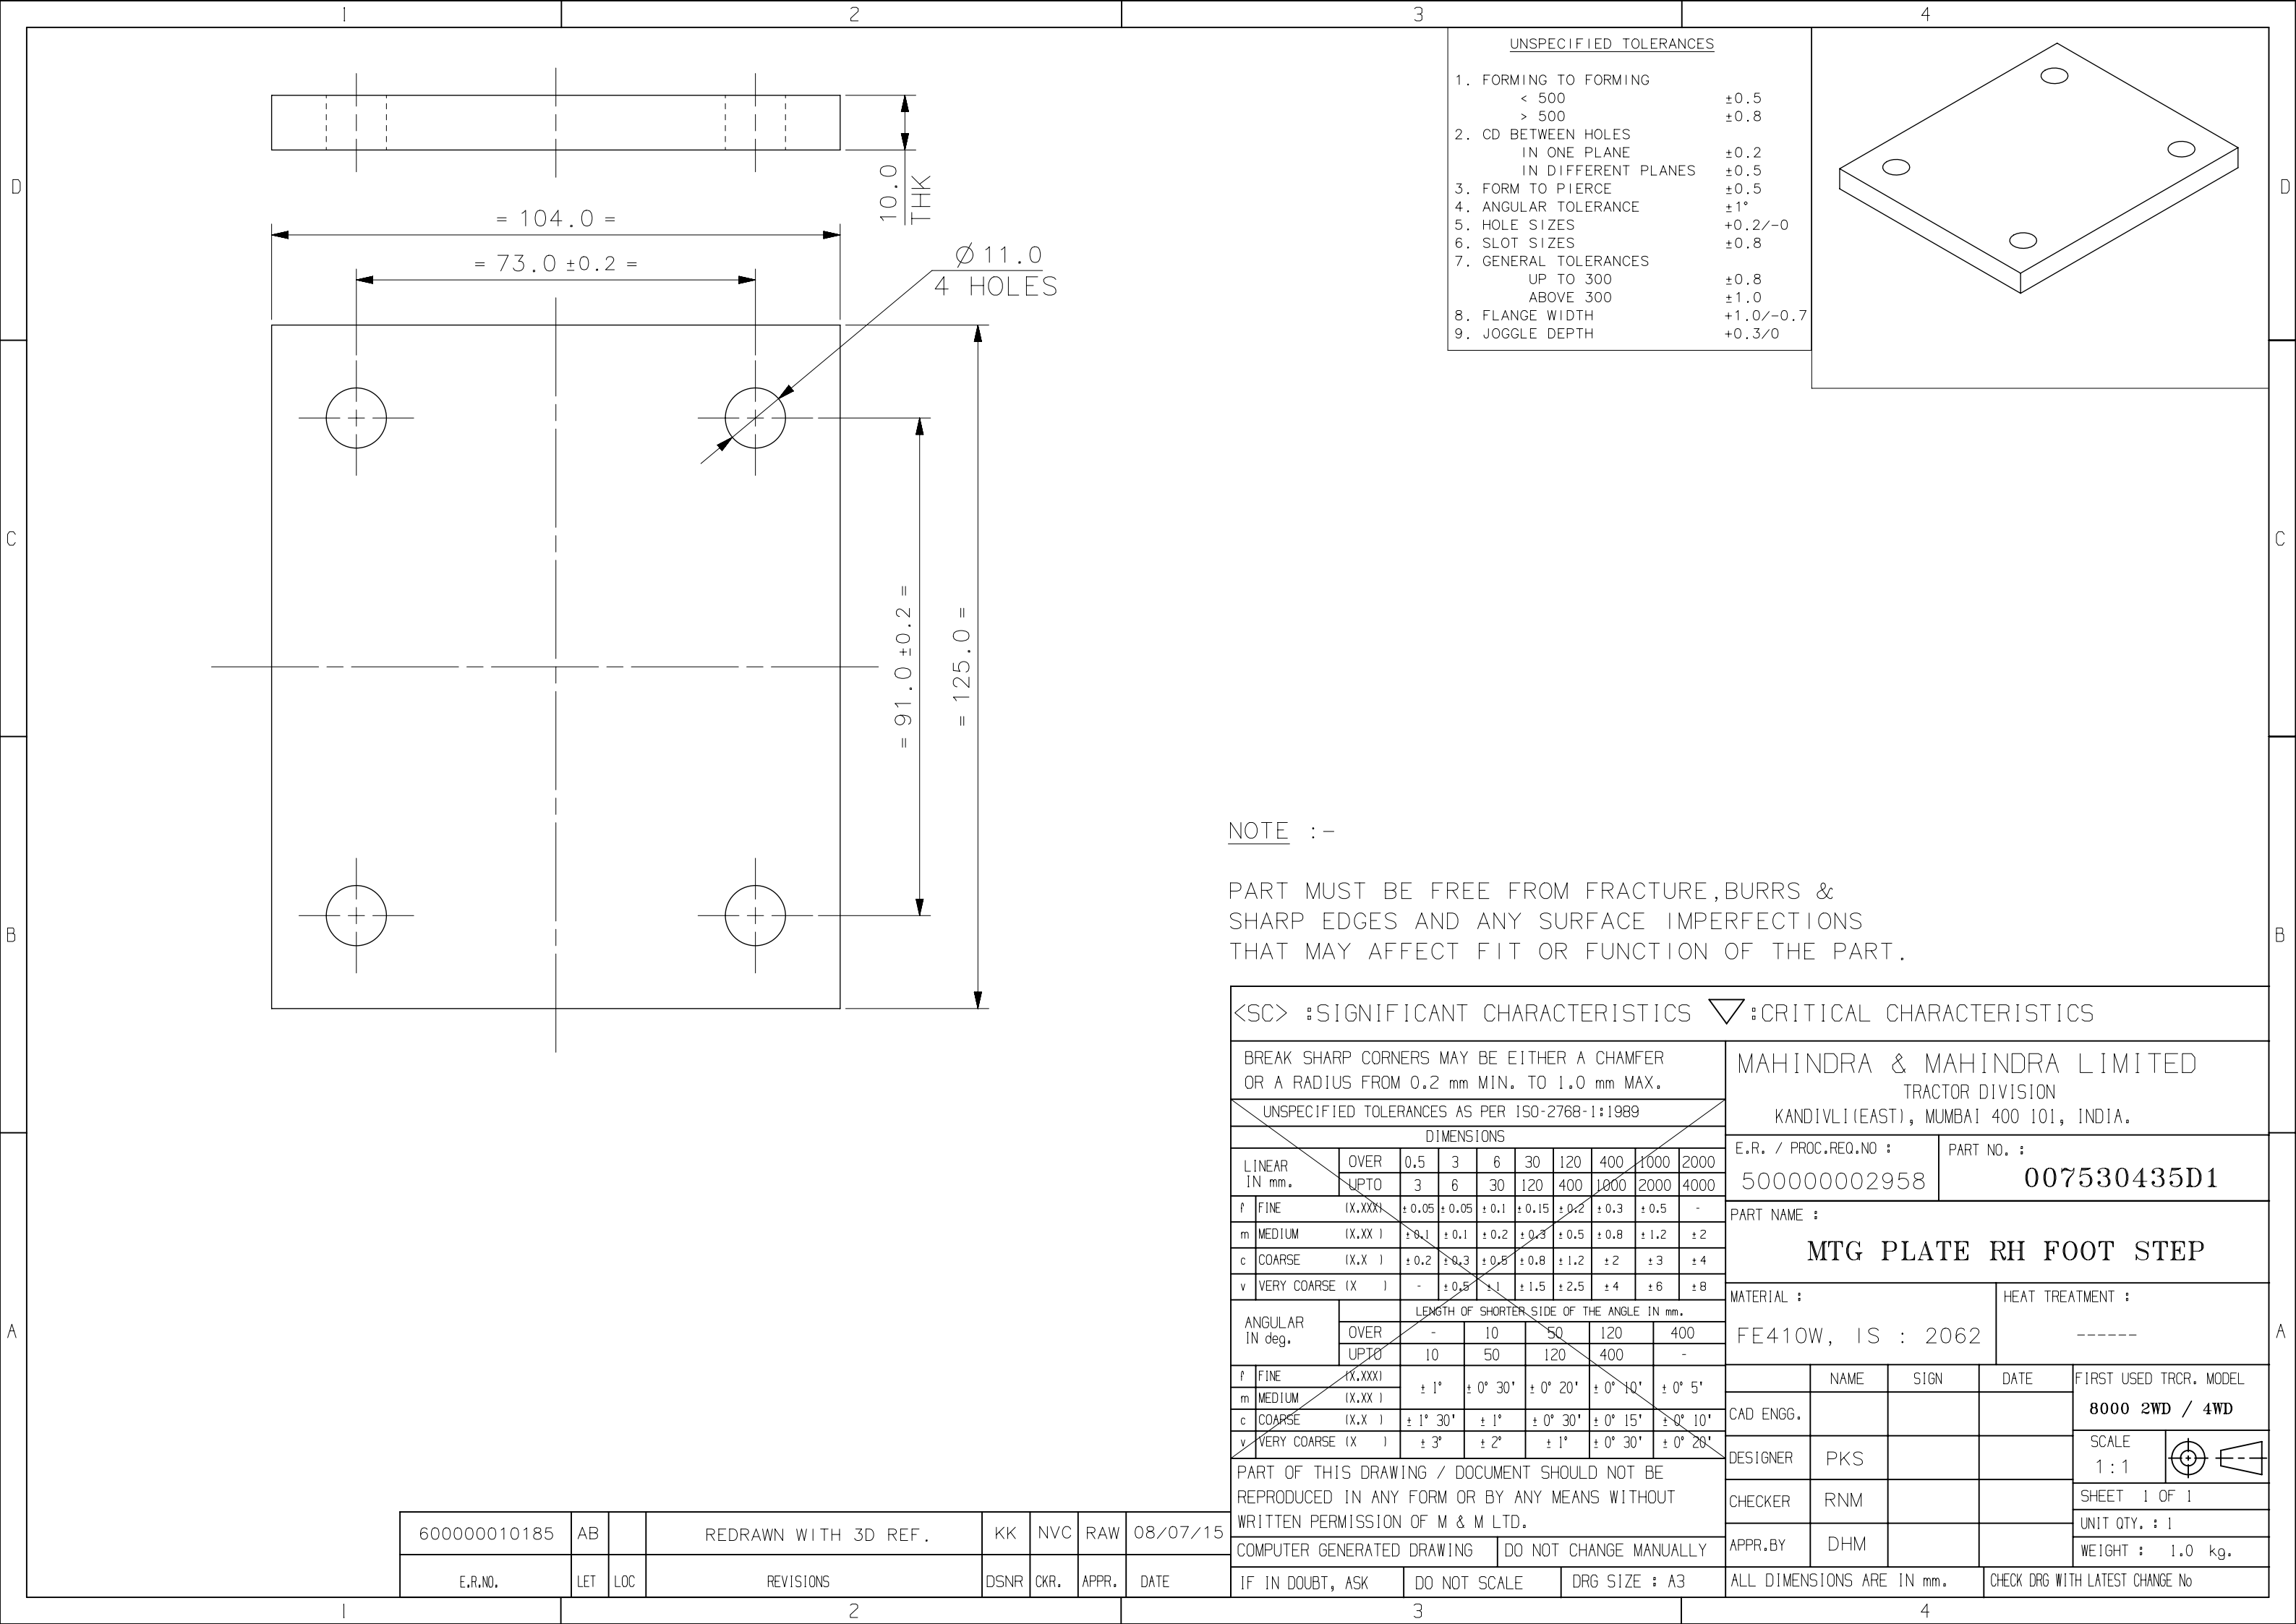

NOTE :-

PART MUST BE FREE FROM FRACTURE, BURRS & SHARP EDGES AND ANY SURFACE IMPERFECTIONS THAT MAY AFFECT FIT OR FUNCTION OF THE PART.

<SC> :SIGNIFICANT CHARACTERISTICS ▽:CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.		MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI(EAST), MUMBAI 400 101, INDIA.																																																															
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989		E.R. / PROC.REQ.NO : 500000002958		PART NO. : 007530435D1																																																													
DIMENSIONS		PART NAME : MTG PLATE RH FOOT STEP																																																															
<table><tr><td>LINEAR IN mm.</td><td>OVER</td><td>0.5</td><td>3</td><td>6</td><td>30</td><td>120</td><td>400</td><td>1000</td><td>2000</td></tr><tr><td></td><td>UPTO</td><td>3</td><td>6</td><td>30</td><td>120</td><td>400</td><td>1000</td><td>2000</td><td>4000</td></tr><tr><td>f FINE (X.XXX)</td><td></td><td>± 0.05</td><td>± 0.05</td><td>± 0.1</td><td>± 0.15</td><td>± 0.2</td><td>± 0.3</td><td>± 0.5</td><td>-</td></tr><tr><td>m MEDIUM (X.XX)</td><td></td><td>± 0.1</td><td>± 0.1</td><td>± 0.2</td><td>± 0.3</td><td>± 0.5</td><td>± 0.8</td><td>± 1.2</td><td>± 2</td></tr><tr><td>c COARSE (X.X)</td><td></td><td>± 0.2</td><td>± 0.3</td><td>± 0.5</td><td>± 0.8</td><td>± 1.2</td><td>± 2</td><td>± 3</td><td>± 4</td></tr><tr><td>v VERY COARSE (X)</td><td></td><td>-</td><td>± 0.5</td><td>± 1</td><td>± 1.5</td><td>± 2.5</td><td>± 4</td><td>± 6</td><td>± 8</td></tr></table>		LINEAR IN mm.	OVER	0.5	3	6	30	120	400	1000	2000		UPTO	3	6	30	120	400	1000	2000	4000	f FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-	m MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	c COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4	v VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8	PART NAME :			
LINEAR IN mm.	OVER	0.5	3	6	30	120	400	1000	2000																																																								
	UPTO	3	6	30	120	400	1000	2000	4000																																																								
f FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-																																																								
m MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2																																																								
c COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4																																																								
v VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8																																																								
<table><tr><td>ANGULAR IN deg.</td><td>OVER</td><td colspan="4">LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.</td></tr><tr><td></td><td>UPTO</td><td>10</td><td>50</td><td>120</td><td>400</td></tr><tr><td>f FINE (X.XXX)</td><td></td><td>± 1°</td><td>± 0° 30'</td><td>± 0° 20'</td><td>± 0° 10'</td></tr><tr><td>m MEDIUM (X.XX)</td><td></td><td>± 1°</td><td>± 0° 30'</td><td>± 0° 20'</td><td>± 0° 10'</td></tr><tr><td>c COARSE (X.X)</td><td></td><td>± 1° 30'</td><td>± 1°</td><td>± 0° 30'</td><td>± 0° 15'</td></tr><tr><td>v VERY COARSE (X)</td><td></td><td>± 3°</td><td>± 2°</td><td>± 1°</td><td>± 0° 30'</td></tr></table>		ANGULAR IN deg.	OVER	LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.					UPTO	10	50	120	400	f FINE (X.XXX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'	m MEDIUM (X.XX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'	c COARSE (X.X)		± 1° 30'	± 1°	± 0° 30'	± 0° 15'	v VERY COARSE (X)		± 3°	± 2°	± 1°	± 0° 30'	MATERIAL : FE410W, IS : 2062		HEAT TREATMENT : -----																									
ANGULAR IN deg.	OVER	LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.																																																															
	UPTO	10	50	120	400																																																												
f FINE (X.XXX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'																																																												
m MEDIUM (X.XX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'																																																												
c COARSE (X.X)		± 1° 30'	± 1°	± 0° 30'	± 0° 15'																																																												
v VERY COARSE (X)		± 3°	± 2°	± 1°	± 0° 30'																																																												
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.		NAME		SIGN	DATE	FIRST USED TRCR. MODEL																																																											
COMPUTER GENERATED DRAWING		CAD ENGG.				8000 2WD / 4WD																																																											
DO NOT CHANGE MANUALLY		DESIGNER		PKS		SCALE 1 : 1																																																											
		CHECKER		RNM		SHEET 1 OF 1																																																											
		APPR.BY		DHM		UNIT QTY. : 1																																																											
						WEIGHT : 1.0 kg.																																																											
IF IN DOUBT, ASK		DO NOT SCALE		DRG SIZE : A3		ALL DIMENSIONS ARE IN mm.																																																											
						CHECK DRG WITH LATEST CHANGE No																																																											